



LITHIUM BATTERY

ER14505M

- ER14250
- ER14335
- ER14505
- ER18505
- ER26500
- ER34615
- ER14505M**
- ER18505M
- ER26500M
- ER34615M
- ER9V
- CR123A
- CR17450
- CR26500
- CR34615
- CR-P2

优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 1%）
 气密的玻璃封口金属外盖
 非可燃性电解液
 卷绕式结构
 已通过 UL, CE、SGS 认证
 通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
 Low self-discharge rate(less than 1% after 1 year storage at +25°C)
 Hermetic glass-to-metal sealing
 Non-flammable electrolyte
 Spiral type
 UL,CE,SGS recognized
 ISO9001 approved

性能数据


标称容量	2200mAh
额定电压	3.6V
最大连续工作电流	400mA
最大脉冲电流	1000mA
电池重量	约 19g
电池最大外形尺寸	Ø14.5*50.5mm
工作温度	-60°C ~ +85°C

Electrical Characteristics

Nominal capacity	2200mAh
Nominal voltage	3.6V
Max.continuous current	400mA
Max.pulse current capability	1000mA
Weight	Approx.19g
Dimension	Ø14.5*50.5mm
Operating temperature range	-60°C ~+85°C


25°C放电特性

Discharge Characteristics(25°C)

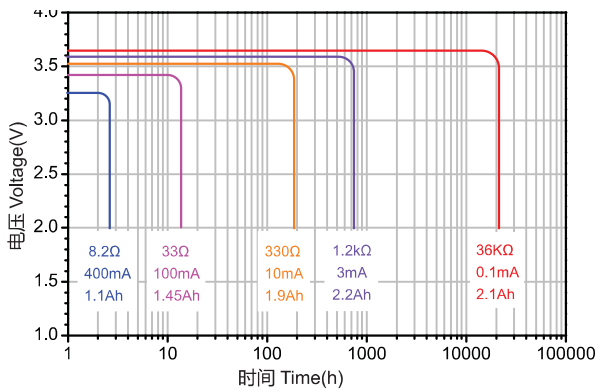


电压与温度关系

Voltage vs. Temperature

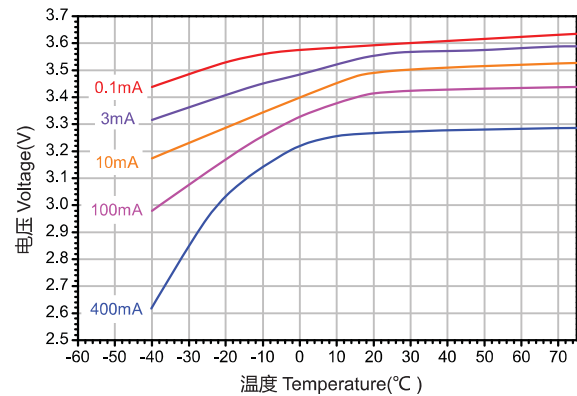


容量与电流关系

Capacity vs. Current

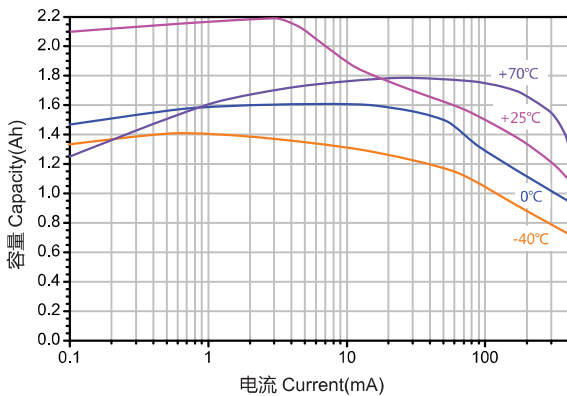

电池尺寸图

Battery Dimension

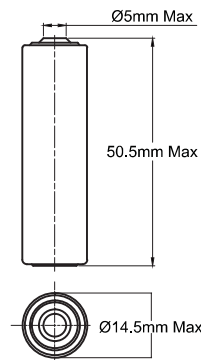

- + Available terminations:
- /P axial pins
- 2PT/T radial pins
- 3PT/4PT polarized tabs

极端样式：
 -/P 轴向碰焊线
 -2PT/T 径向插件
 -3PT/4PT 多脚插件

- + Available terminations can be made as requested.
- 特殊极端样式可按客户要求订做