



LITHIUM BATTERY

# ER26500

## 优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C的条件下贮存，年自放电率低于 1%）  
 气密的玻璃封口金属外盖  
 非可燃性电解液  
 碳包式结构  
 已通过 UL, CE、SGS 认证  
 通过 ISO9001 质量管理体系认证

## Key Characteristics

High and stable operating voltage  
 Low self-discharge rate(less than 1% after 1 year storage at +25°C)  
 Hermetic glass-to-metal sealing  
 Non-flammable electrolyte  
 Bobbin type  
 UL,CE,SGS recognized  
 ISO9001 approved


## 性能数据

标称容量 9000mAh  
 额定电压 3.6V  
 最大连续工作电流 150mA  
 最大脉冲电流 300mA  
 电池重量 约 55g  
 电池最大外形尺寸 Ø26.2\*50.0mm  
 工作温度 -60°C ~+85°C


## Electrical Characteristics

Nominal capacity 9000mAh  
 Nominal voltage 3.6V  
 Max.continuous current 150mA  
 Max.pulse current capability 300mA  
 Weight Approx.55g  
 Dimension Ø26.2\*50.0mm  
 Operating temperature range -60°C ~+85°C


## 25°C放电特性 Discharge Characteristics(25°C)

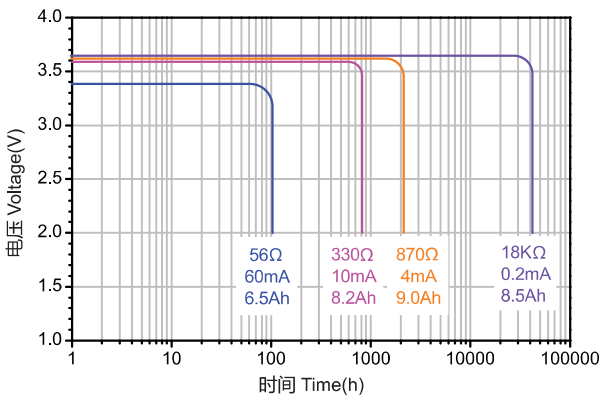


## 电压与温度关系 Voltage vs. Temperature

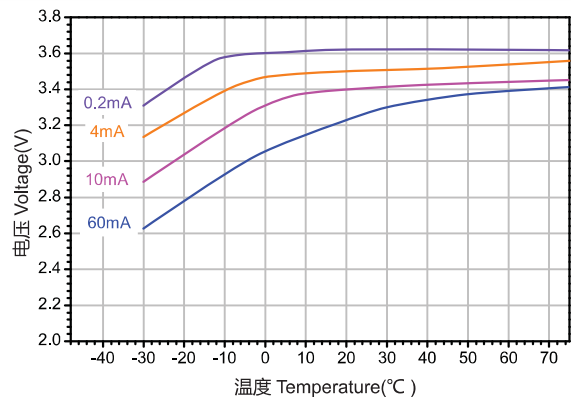

## 容量与电流关系 Capacity vs. Current

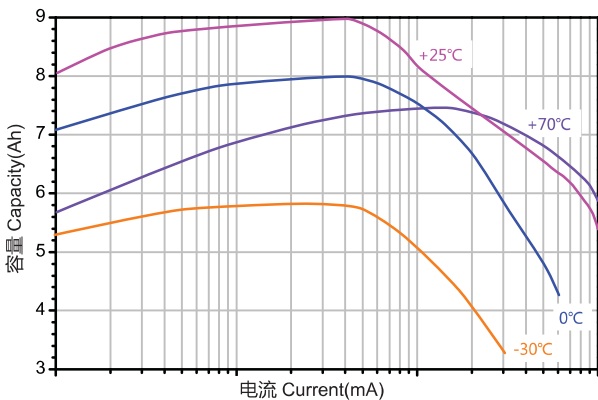

## 电池尺寸图 Battery Dimension

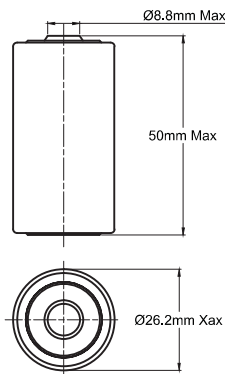

- + Available terminations:  
 -/P axialpins  
 -2PT/T radial pins  
 -3PT/4PT polarized tabs

极端样式：  
 -/P 轴向碰焊线  
 -2PT/T 径向插件  
 -3PT/4PT 多脚插件

- + Available terminations can be made as requested.  
 特殊极端样式可按客户要求订做