

LITHIUM BATTERY ER34615

优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 1%）
气密的玻璃封口金属外盖
非可燃性电解液
碳包式结构
已通过 UL, CE, SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate (less than 1% after 1 year storage at +25°C)
Hermetic glass-to-metal sealing
Non-flammable electrolyte
Bobbin type
UL, CE, SGS recognized
ISO9001 approved


性能数据

标称容量 19000mAh
额定电压 3.6V
最大连续工作电流 230mA
最大脉冲电流 400mA
电池重量 约 107g
电池最大外形尺寸 Ø34.0*61.5mm
工作温度 -60°C ~ +85°C


Electrical Characteristics

Nominal capacity 19000mAh
Nominal voltage 3.6V
Max. continuous current 230mA
Max. pulse current capability 400mA
Weight Approx. 107g
Dimension Ø34.0*61.5mm
Operating temperature range -60°C ~ +85°C


25°C 放电特性 Discharge Characteristics (25°C)

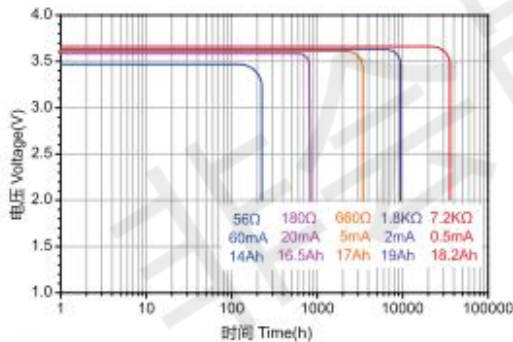


电压与温度关系 Voltage vs. Temperature

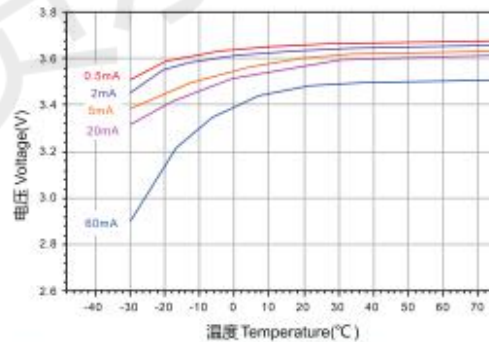

容量与电流关系 Capacity vs. Current

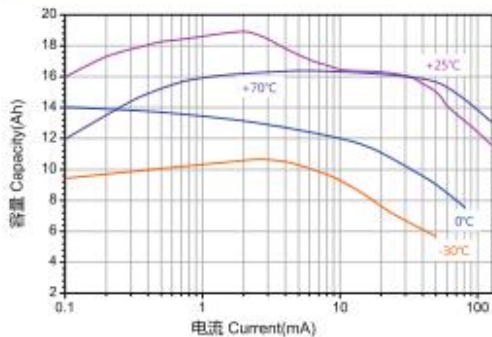

电池尺寸图 Battery Dimension

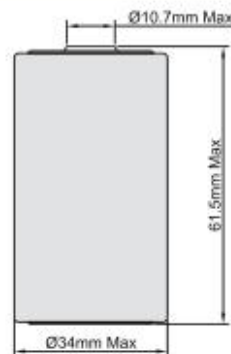

- Available terminations:
- /P axial pins
- 2PT/T radial pins
- 3PT/4PT polarized tabs

极帽样式：
- /P 轴向铆焊帽
- 2PT/T 径向铆帽
- 3PT/4PT 多极铆帽

- Available terminations can be made as requested.
特殊极帽样式可按客户要求订做