

LITHIUM BATTERY ER14250



优点及特征

工作电压平稳, 在应用的寿命期内具有高而稳定的电压响应 低自放电率 (在 +25°C 的条件下贮存, 年自放电率低于 1%)
气密的玻璃封口金属外盖
非可燃性电解液
碳包式结构
已通过 UL, CE, SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate (less than 1% after 1 year storage at +25°C)
Hermetic glass-to-metal sealing
Non-flammable electrolyte
Bobbin type
UL, CE, SGS recognized
ISO9001 approved


性能数据

标称容量	1200mAh
额定电压	3.6V
最大连续工作电流	25mA
最大脉冲电流	50mA
电池重量	约 11g
电池最大外形尺寸	Ø14.5*25.4mm
工作温度	-60°C ~ +85°C


Electrical Characteristics

Nominal capacity	1200mAh
Nominal voltage	3.6V
Max. continuous current	25mA
Max. pulse current capability	50mA
Weight	Approx. 11g
Dimension	Ø14.5*25.4mm
Operating temperature range	-60°C ~ +85°C


25°C 放电特性 Discharge Characteristics(25°C)

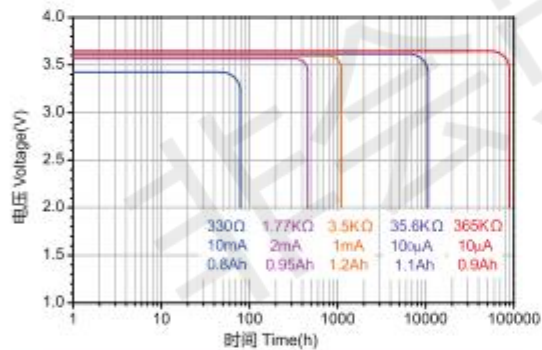


电压与温度关系 Voltage vs. Temperature

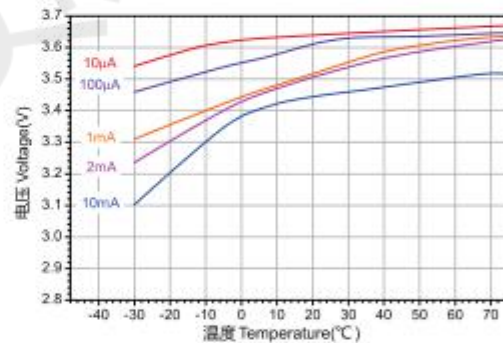

容量与电流关系 Capacity vs. Current

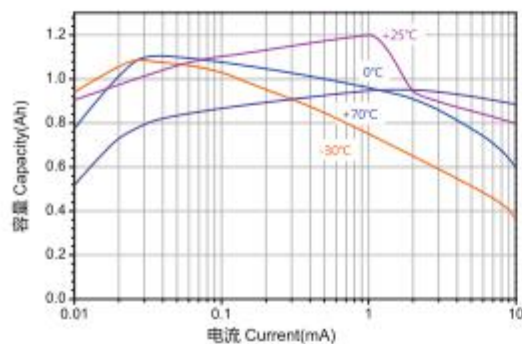

电池尺寸图 Battery Dimension



- Available terminations
- P axial pins
- 2P/T radial pins
- 3PT/APT polarized tabs

极帽样式:
-P 轴勾端焊线
-2P/T 径向零件
-3PT/APT 多脚插件

- Available terminations can be made as requested.
- 特殊极帽样式可按客户要求订制