

LITHIUM BATTERY ER26500



优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 1%）
气密的玻璃封口金属外盖
非可燃性电解液
碗包式结构
已通过 UL、CE、SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate (less than 1% after 1 year storage at +25°C)
Hermetic glass-to-metal sealing
Non-flammable electrolyte
Bobbin type
UL, CE, SGS recognized
ISO9001 approved


性能数据

标称容量	9000mAh
额定电压	3.6V
最大连续工作电流	180mA
最大脉冲电流	320mA
电池重量	约55g
电池最大外形尺寸	Ø26.2*50.0mm
工作温度	-60°C ~ +85°C


Electrical Characteristics

Nominal capacity	9000mAh
Nominal voltage	3.6V
Max. continuous current	180mA
Max. pulse current capability	320mA
Weight	Approx. 55g
Dimension	Ø26.2*50.0mm
Operating temperature range	-60°C ~ +85°C


25°C 放电特性 Discharge Characteristics (25°C)

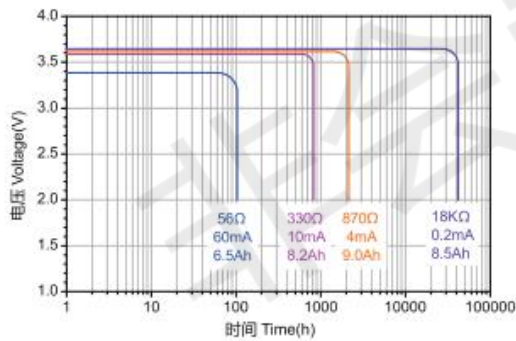


电压与温度关系 Voltage vs. Temperature

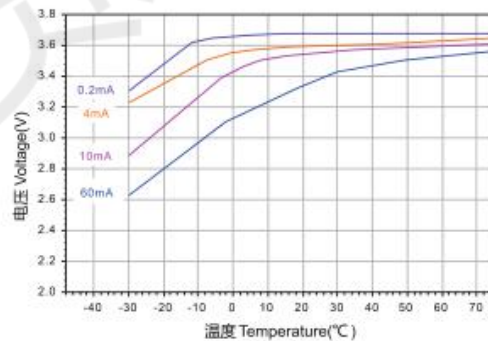

容量与电流关系 Capacity vs. Current

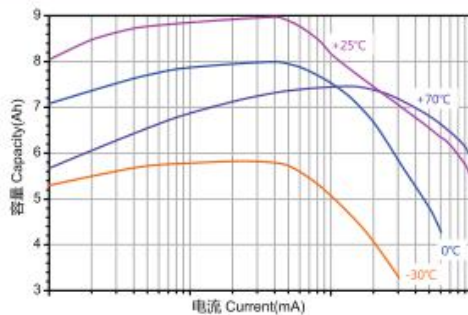

电池尺寸图 Battery Dimension

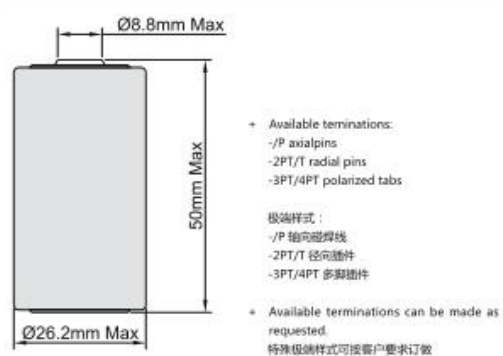

- ER16340
- ER14230
- ER14210
- ER14505
- ER16505
- ER26500**
- ER16475
- ER3V
- ER16230HC
- ER16475HC
- ER14505M
- ER16320M
- ER26500M
- ER16115M
- ER16115M
- CR125A
- CR17450
- CR26500
- CR14675
- CR125
- CR14505
- CR14675